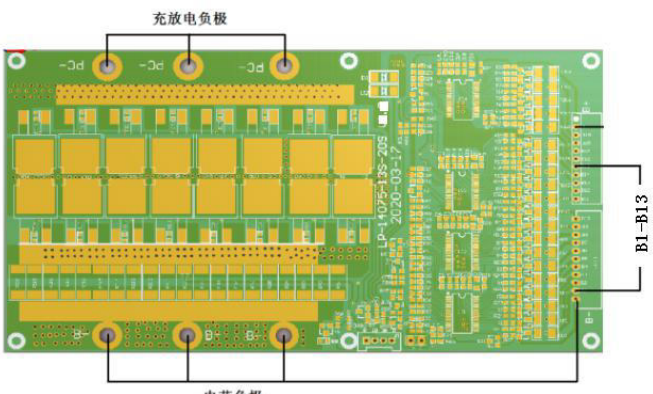


Model: BMS -A1304(Li-ion 13S-100A)		
Test item (Test at normal temperature 25±2℃)		Criterion
Voltage	Charging voltage	DC:54.6V CC/CV (4.2v/Cell) 1S
Supply Current	Normal operating mode current: Fuel gauge in NORMAL mode. ILOAD >Sleep Current	≤60uA
	Maximal continuous charging current	100A
	Maximal continuous discharging current	100A
	Balance current for single cell	28±5mA
Over-charge Protection (single cell)	Balance voltage for single cell	4.19±0.05V
	Over charge detection voltage	4.25±0.05V
	Over charge detection delay time	500-1500mS
	Over charge release voltage	4.19±0.10V
Over discharge protection (single cell)	Over discharge detection voltage	2.5±0.10V
	Over discharge detection delay time	500-1500mS
	Over discharge release voltage	2.7±0.10V
Current protection (Battery pack)	ChargeOver current detection current	120-200A
	Detection delay time	20-120mS
	Discharge Over current detection current	280-400A
	Detection delay time	100-300mS
	Release condition	Cut load/Charge
Discharge Short protection	Detection condition	Exterior short circuit
	Detection delay time	100-500us
	Release condition	Cut load
Resistance	Main loop electrify resistance	≤60mΩ
Temperature	Operating Temperature Range	-40~+65℃
	Storage Temperature Range	-40~+85℃
SIZE: L140*W75*T18mm		
NTC:10K Temperature switch: / Weak current switch: / Activation Method:/		
 13串同口接线图		